


## INSIDE THE METER BOX

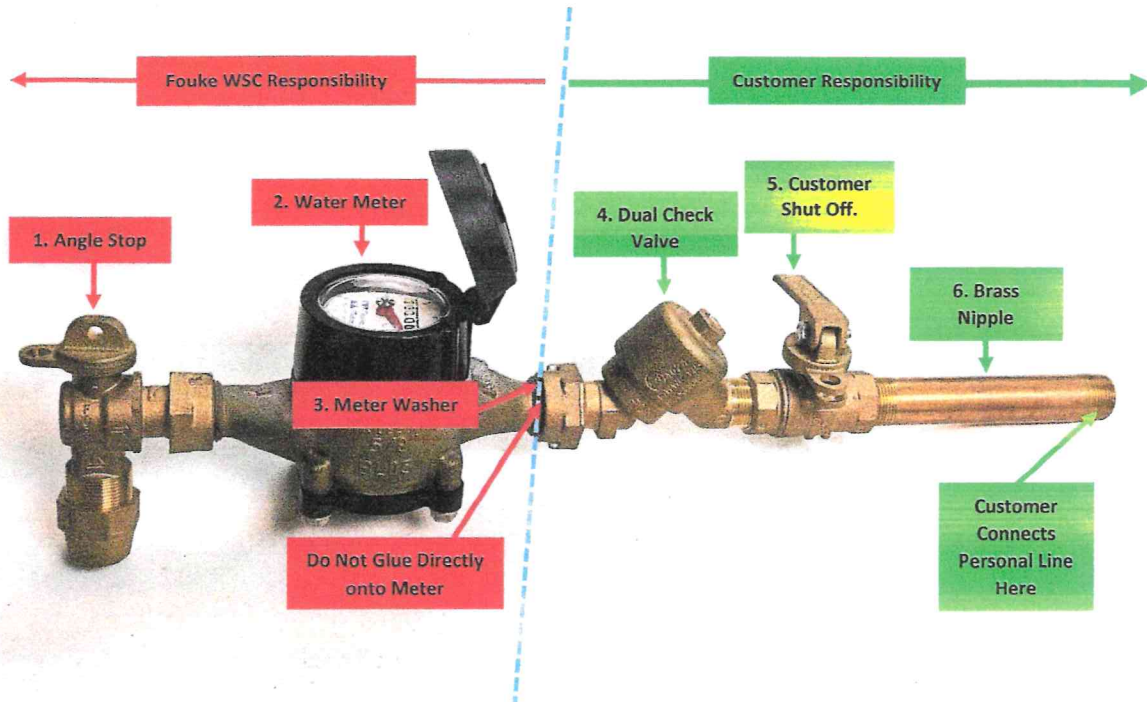

The blue dotted line shows the division between the Corporation's ownership and the customer's ownership. A dual check valve, ball valve and brass nipple are installed upon new installation. It is required for all customers to maintain and replace when necessary.

1. Angle Stop – Corporation's use only.
2. Water Meter – Corporation has an Automatic Meter Read (AMR) drive-by system. Each meter has battery operated electronics inside capable of sending meter readings to a computer with a special programmed software. Each meter is equipped with its own electronic id which is tied to individual accounts.
3. Meter Washer – 3/4" X 1/8" Meter washer goes between the meter and the check valve connection.
4. Dual Check Valve – To help protect our water system, we must make sure there is sufficient protection against any possible backflow. The Corporation will install a dual check valve to eliminate any potential problems from backflow or cross connection from the customer's connection.
5. Customer Shut Off - 3/4" Brass female straight stop with a brass handle.
6. Customer Connection – 3/4" Brass Nipple.